


MX7 | First V2G Ready Home Charger



Experience efficient charging and greater savings with the Humax MX7. Designed for home charging convenience, it also supports business fleet charging at home with a built-in **PLC module**, **ISO15118 protocol** enabled and seamless 3P SW integration.

Its intelligent charging system optimizes energy use through customizable charge levels and schedules. Compatible with a wide range of EV tariffs, it ensures maximum flexibility and cost savings. Elevate your EV experience with a customizable, stylish design that blends seamlessly into any environment while delivering cutting-edge performance.

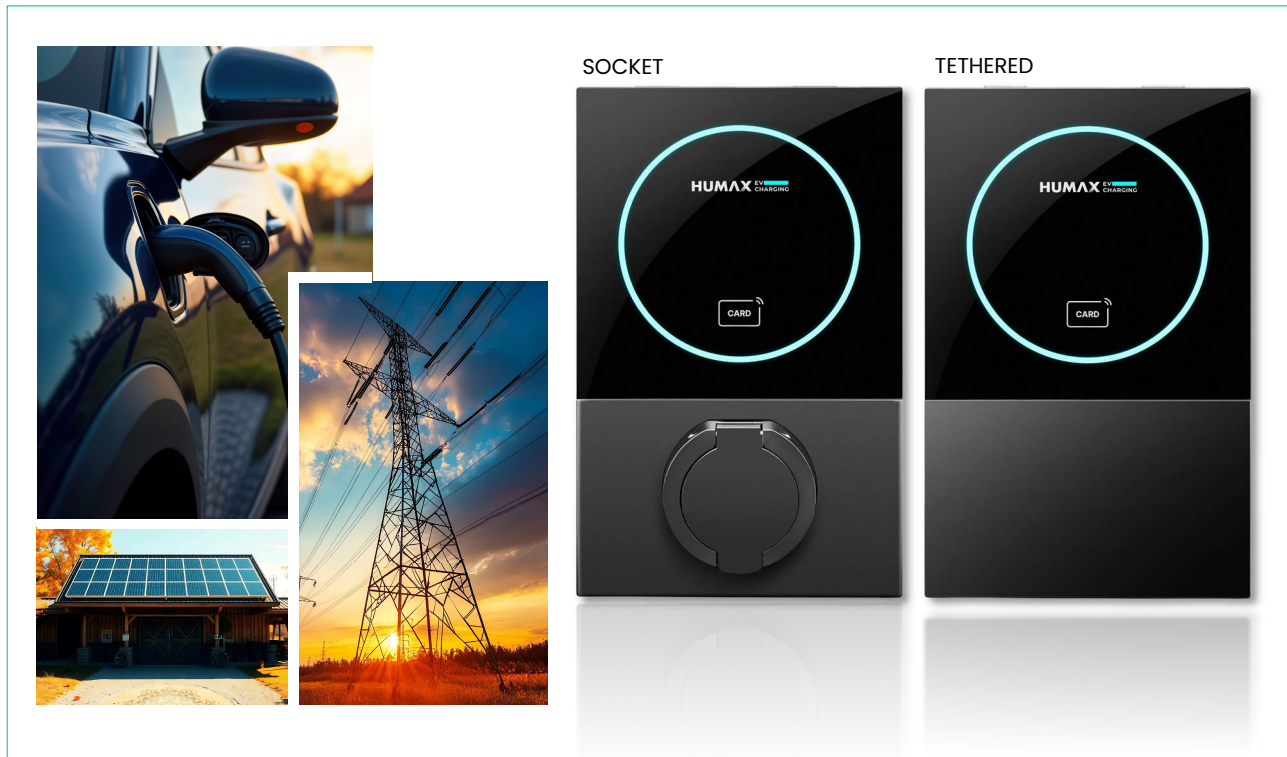

Built-in PLC module



Intelligent Charging



HEMS integration ready





ISO 15118 protocol enabled

V2G

V2G ready* from HW

*V2G functionality requires collaboration between vehicle manufacturers, energy tariff providers, and your local grid operator. Availability of V2G may vary depending on region, vehicle compatibility, and local infrastructure. Selling power back to the grid may need a software subscription

SPECIFICATIONS

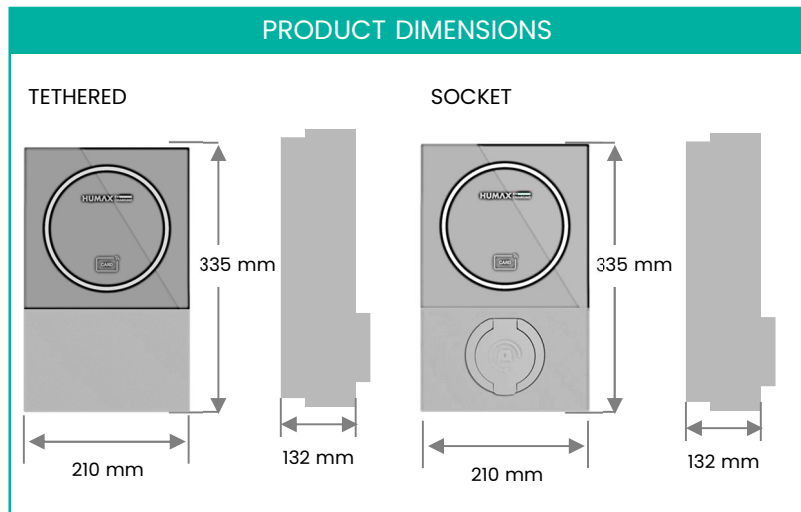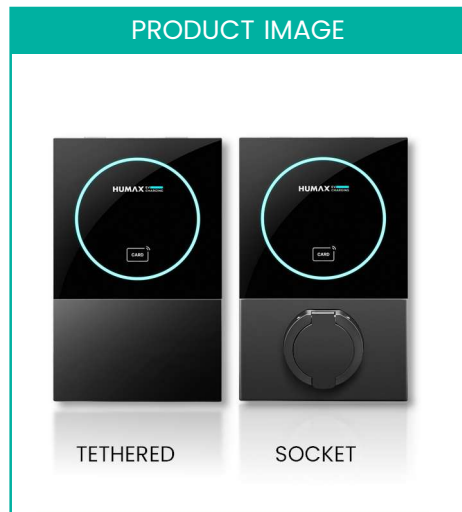

| SPECIFICATIONS | | | |
|----------------|----------------------------|---|---------------------|
| Model | | Tethered | Socket |
| Input | Power Supply | Single-phase | |
| | Rated Voltage | 230V AC | |
| | Rated Current | 32A | |
| | Frequency | 50Hz | |
| User Interface | Charge Connector | 5M and 7.5M cable length | Type 2 Cable socket |
| | Housing Material | PC/ASA | |
| | LED Indicator | White/Blue/Green/Yellow/Red | |
| | RFID/NFC | ISO/IEC 14443 Type A (Mifare Classic, 13.56 MHz) | |
| | Start Mode | Plug&Play/RFID card/App | |
| Communication | Communication | Wi-Fi, Bluetooth LE and Ethernet (4G Optional) | |
| | Protocol | OCPP 1.6J | |
| Safety | Ingress Protection | Tethered: IP65 | Socket : IP54 |
| | Impact Protection | IK10 | |
| | Electrical Protection | Over current protection, Residual current protection, Surge protection, Over/Under voltage protection, Over/Under frequency protection, Over temperature protection, PEN fault protection, Tamper protection | |
| | Certification and Standard | BS EN IEC 61851-1:2019, BS IEC 62955:2018, BS EN IEC 61851-21-2:2021, BS EN IEC 61000-6-1:2019, BS EN IEC 61000-6-3:2021, EN 301 489-1 V2.3:2019, EN 301 489-3 V2.3.2:2023, EN 301 489-17 V3.2.4:2020, EN 300 330 V2.1.1:2017, EN 300 328 V2.2.2:2019, BS EN IEC 62311:2020, BS EN IEC 62311:2020, BS EN IEC 63000:2018, BS 7621:2018, EN 303 645, IEC 62196, ISO 15118 ready, UK EVSCP Regulation 2021 | |
| | Warranty | Up to 5 years* | |
| Environment | Installation | Wall-mount and Pole-stand (option) | |
| | Work Temperature | -30°C ~+50°C | |
| | Work Humidity | 5%~95% | |
| | Work Altitude | <2,000m | |
| Package | Product Dimension | Tethered : 335mm * 210mm * 132mm, Socket Type : TBC | |
| | Package Dimension | 465mm * 258mm * 316mm | |

*The above information is generally descriptive only and is not intended as guarantee or warranty

**Humax reserves the right to alter or amend the design, model and specification without prior notice.

PRODUCT FEATURES



Intelligent Charging

Set a **preferred charge level** and "**ready by**" **time** for optimized, energy-efficient charging.



EV Tariff Compatibility

Works with wide range of EV tariffs for maximum flexibility and cost savings.



Maximize Savings with Surplus Solar

Automatically **use extra solar energy** after meeting home needs, with alerts for surplus power.



Overcharge Protection

Prevents the EV battery from overcharging enhancing battery life and safety.



Built-in Temperature Sensor

Automatically adjusts charging based on internal temperature to prevent overheating.



Tamper Protect Switch

Advanced protection against unauthorized access, misuse, or tampering with the charging unit.



Autocharge (ISO15118-3)

Automatically identifies the vehicle and authorizes charging and payment. No need to use an app or RFID cards by ISO15118 protocol.



3P SW integration

Integration capable with leading 3P apps, allowing charging sessions for business vehicles at home to be automatically synchronised



Charging Session Tracker

PLC helps identify business and personal charging sessions, filtering them for fast, easy processing and fraud prevention.




Swappable Front Facia

Match your charger with your home or business environment for a sleek, customized look.

| | Tethered | Socket | |
|--|----------|--------|-------------------------------------|
| Up to 5-year warranty | | | OZEV approved |
| Trusted CE brand with 25 years in the UK | | | UK local call center operation |
| Compatible with all EVs and PHEVs | | | Fully compliant with UK regulations |

HUMAX CHARGE APP

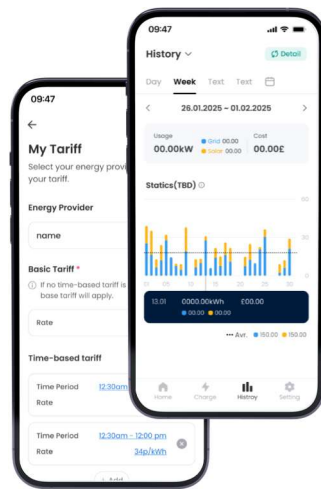

Scan to download



- ✓ **Smart Scheduling**
Schedule charging times to fit your routine and make the most of off-peak energy.

- ✓ **Flexible Charging Modes**
Choose from App mode, RFID mode, or Instant charging to match your needs.

- ✓ **Solar-Powered Charging**
Utilise off-peak, solar, or renewable energy sources for intelligent EV charging.

- ✓ **Easy and simple set up**
Our easy-to-use Installer App walks you through the setup process in minutes.

Humax Charge User App



Get full control of your EV charging, it's simple to use and easy to set up.

Humax Installer App



Our dedicated installer app for qualified electricians allows easy installs, onboarding, and activating the Humax EV Charger.

Support Hub



Installation videos, troubleshooting and FAQs are available at: humaxcharging.com/support-hub

ENQUIRIES

Email : sales@humaxcharging.com | Phone : 0208 326 6000

The Mille, Great West Road Brentford, TW8 9DW
humaxcharging.com/uk