



Humax MX7 | Installer Commissioning Guide

1

Network

Download the Humax Charge installer App.

The screenshot shows the Google Play Store page for the 'Humax Charge Install' app. At the top, the app title 'Humax Charge Install' is displayed in large black font, with 'HUMAX Co., Ltd.' below it. The page includes a green 'Install' button, a 'Share' icon, and an 'Add to wishlist' icon. A large green 'INSTALL' button with a white 'G' logo is positioned to the right. Below the main content, there are six preview cards showing app screenshots with titles like 'Locate Chargers Easily', 'Installation Status', 'Network configuration', 'Test the Charger', and 'Installation Status'. To the right of these cards, there is an 'App support' section with a dropdown arrow, and a 'More by HUMAX Co., Ltd.' section listing other apps: 'Aura' (2.1 stars), 'HUMAX INSTALL', and 'HUMAX CHARGE'. At the bottom left, there is an 'About this app' link and a 'Key Features:' section.



Google Play

<https://play.google.com/store/apps/details?id=com.humaxcharging.app.install>




Available on the App Store

<https://apps.apple.com/us/app/humax-charge-install/id6745581174>

1.1


Network

Log in

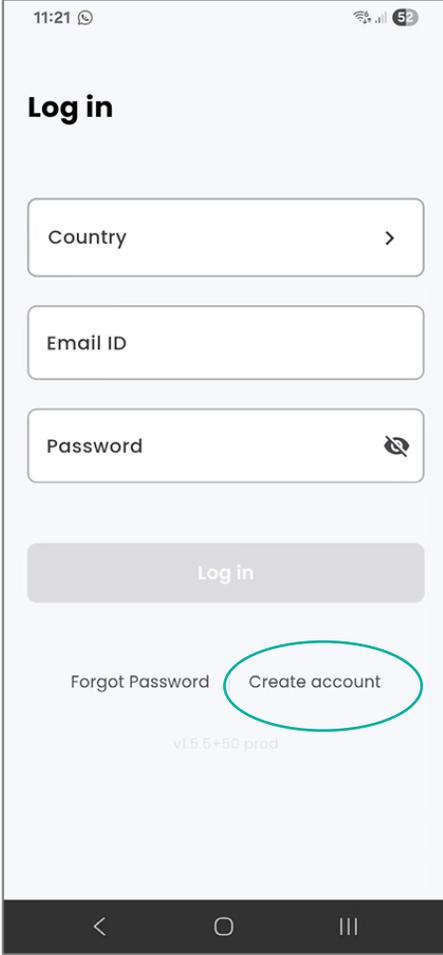

Enter your login credentials.
If you do not yet have an account, select **'Create Account'** to register and obtain your login details.


Once your account has been successfully created, please proceed to enter your login credentials.

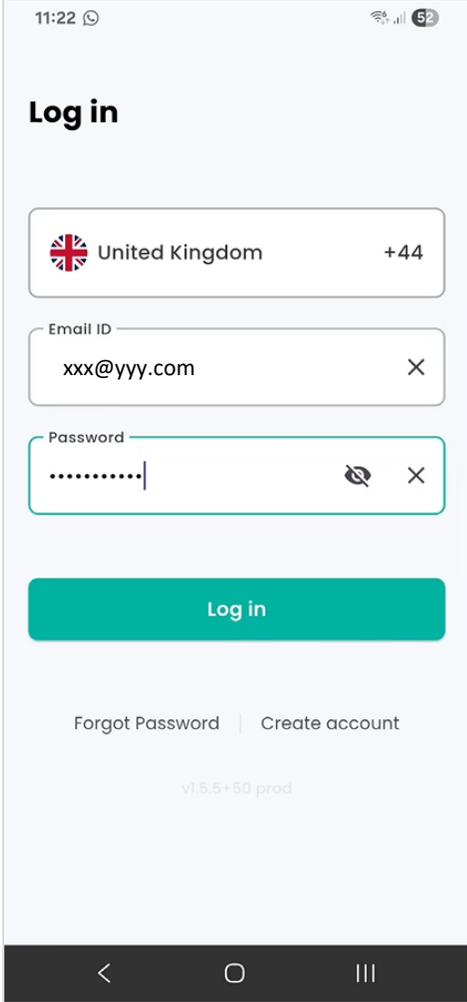

1.2

Network

Connecting the charger

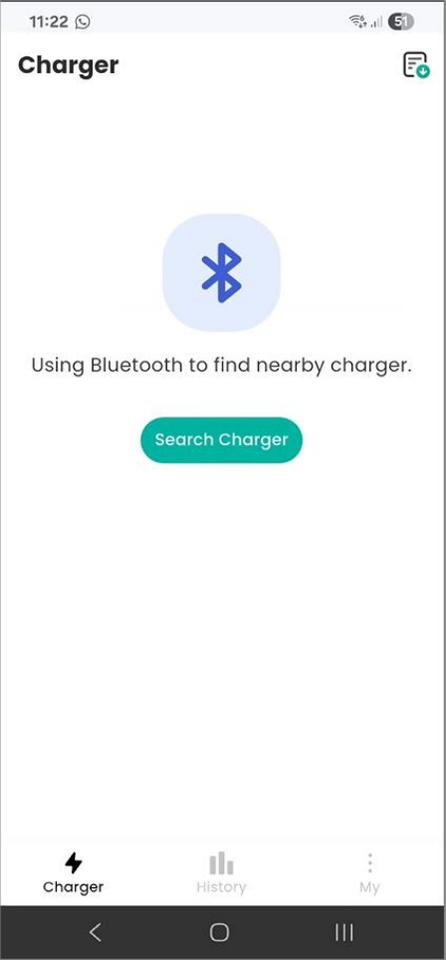


Activate Bluetooth on your mobile device, then select **'Search Charger'**.

Locate the corresponding serial number of the device.

Please note: if you are installing two or more chargers, it is essential that you pair each one using the correct serial number.

For a faster connection, keep your phone close to the charger

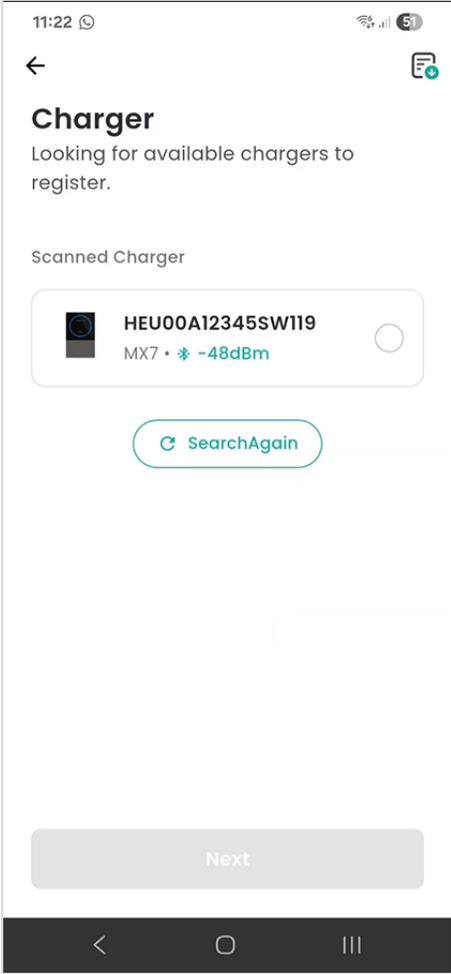


Note: If the charger cannot be located, please reboot the device.

1.2

Network

Connecting the charger

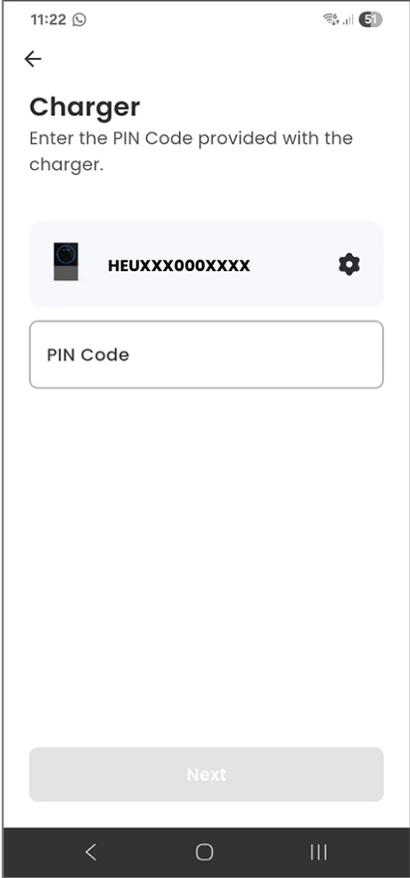

Enter the PIN code. The PIN can be found at the back of the user manual.

1.3

Network

Connecting to the Network

Enable Wi-Fi on your device and connect it to the appropriate wireless network.


Android: The device will automatically search for nearby Wi-Fi networks. Simply select your network (SSID) from the list.

iOS: Tap the field to manually type in your Wi-Fi network name (SSID)

Enter the Wi-fi name & password

If the Wi-Fi network is unavailable, you have the option to establish a connection using an Ethernet cable


OCPP URL for Humax is :
wss://uhc2-server.humaxcharging.com:443

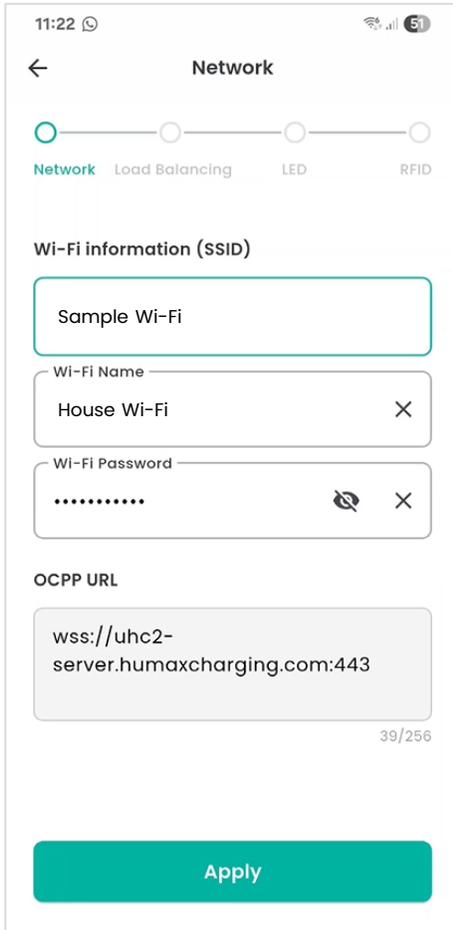

1.3

Network

Connecting to the Network

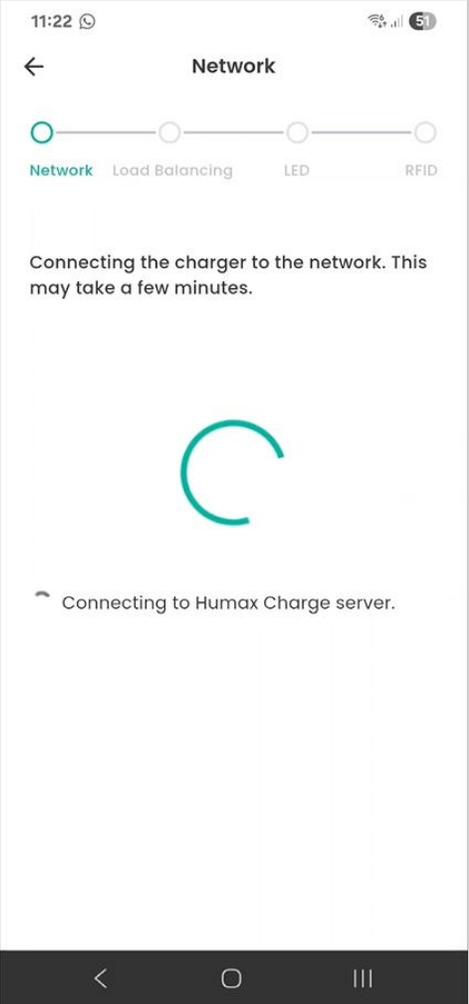


You will now be connected to the server.

Please **note** that this process may take several minutes to complete.

During this process the charger may reboot.


CT Clamp connection

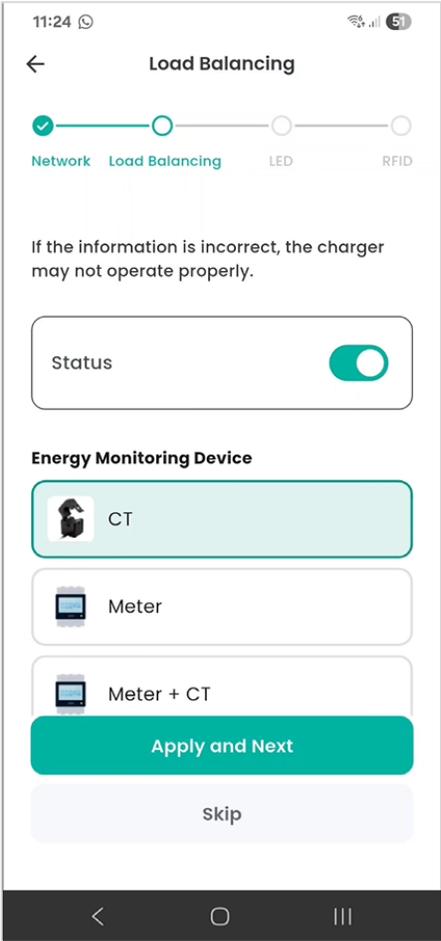

Connect the charger to the energy monitoring device.

Note : Turn this on only if energy monitoring devices are installed.)



Choose the correct device from the list. Set the site's current limit (e.g. 100A).

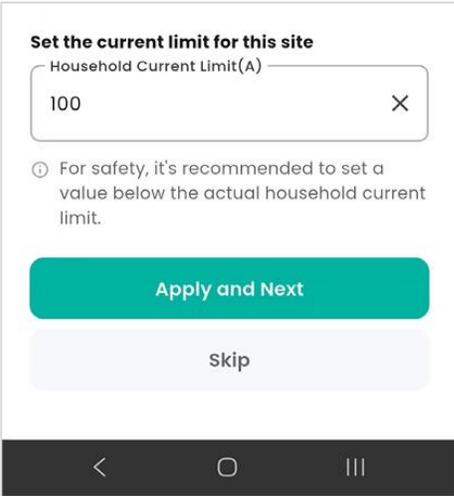

3


LED

Setting LED Brightness

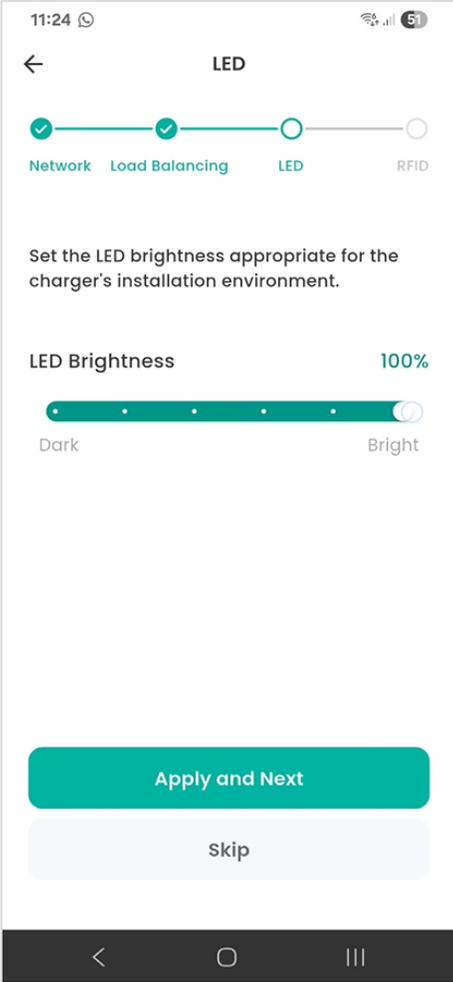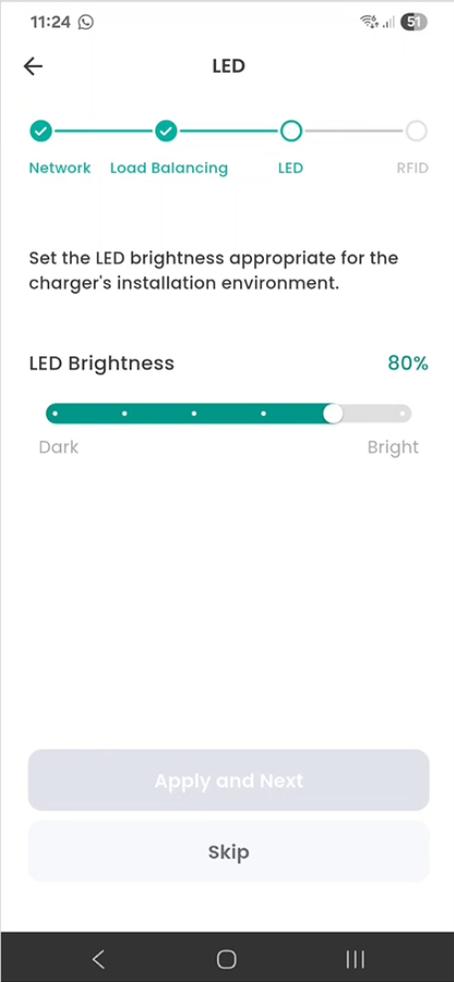

4

RFID Adding RFID card


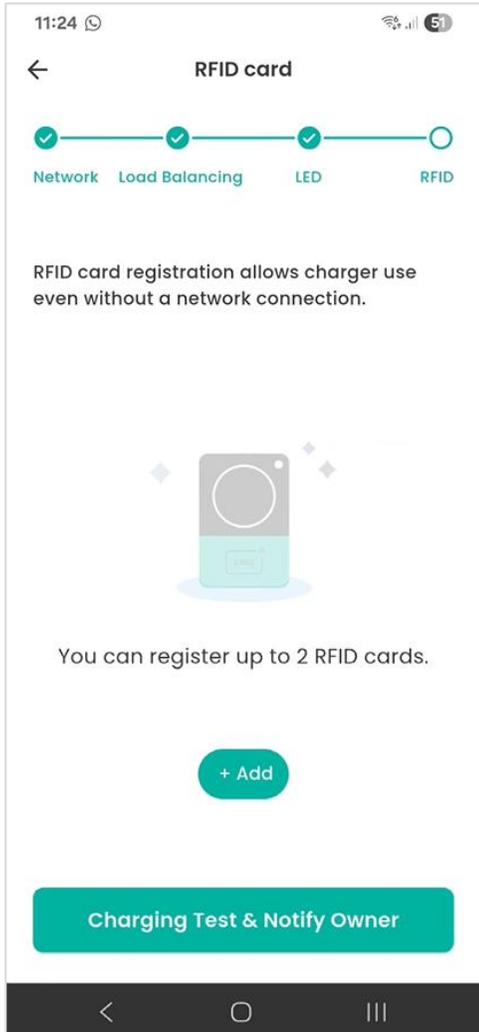


You may register up to two RFID cards.

(a) You can either scan the barcode located on the reverse side of the RFID card using your device's camera,


or

(b) Manually enter the RFID information.

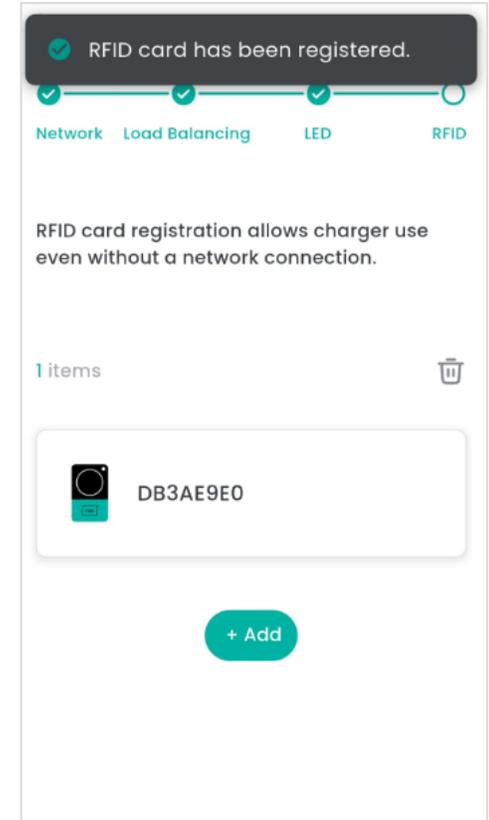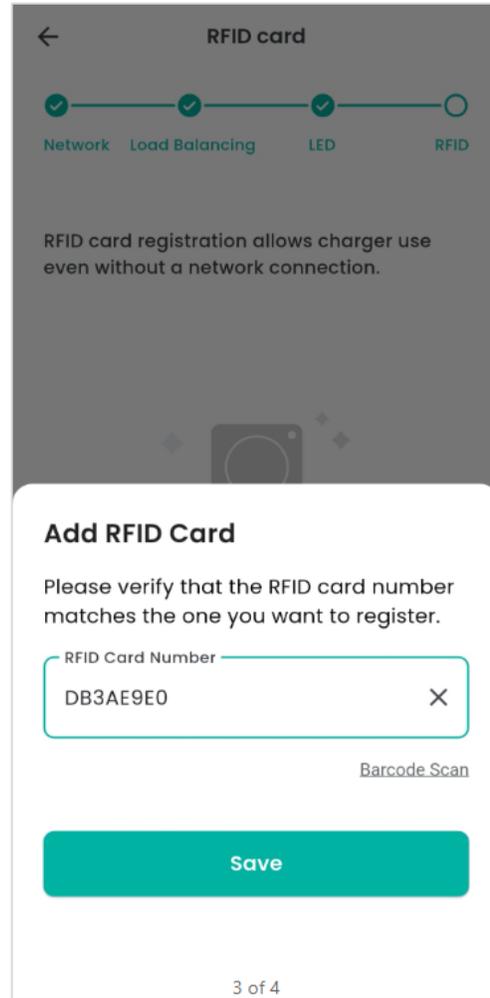

5

Testing

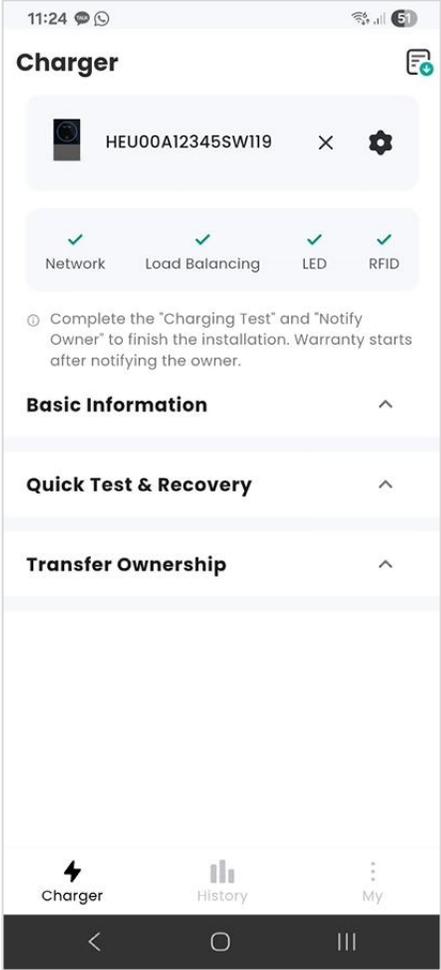

Coming soon ! – (Not available with the current version)

11:25 5G

Charger

Transfer Ownership

Once the charger is installed, enter user info to transfer ownership. A confirmation email will be sent.

User Info

First Name

Last Name

Email ID

Installer Notes

Enter notes about the installation location or charger setup.

0/1000

Charger History My

Select **'Transfer Ownership'** and enter the new owner's details, including their email address.

The owner will receive a registration email containing a link to download the user App

The user has been informed of the [\[Privacy Policy\]](#) and has given consent.

Transfer




Customer Support & Technical Help

0344 318 8800

uk.support@humaxcharging.com

5

Testing

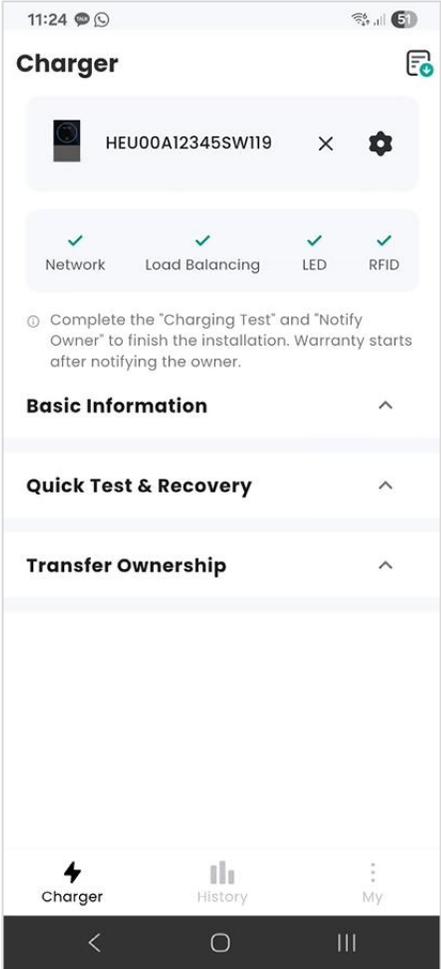

This concludes the setup process.

Please review all the details carefully, then select **'Quick Test and Recovery'**. You may now proceed to test the charger.

Note : It is recommended to use an actual EV for testing the charger.

